


SPECIFICATION

		MODEL	XZU720LC	
ITEM	MODEL CODE		XZU720R - QKMQL3	
ENGINE	MODEL		N04C-VB	
	TYPE		Diesel, 4-cy., vertical, 4-cyl. in-line, overhead valve, water cooled, direct injection	
	DISPLACEMENT	cc	4,009	
	MAX OUTPUT (JIS GROSS)	kW(PS)/rpm	114 (156) / 2,800	
	MAX. TORQUE (JIS GROSS)	Nm(kgfm)/rpm	429 (43.8) / 1,400	
	BORE & STROKE	mm	104 x 118	
	FUEL INJECTION SYSTEM		Electronic control Commonrail type	
	AIR INTAKE SYSTEM		Turbo-intercooled, stack type	
CLUTCH	MAX. ENGINE SPEED	rpm	3,100	
	TYPE		Dry single plate, diaphragm type with damper spring	
TRANSMISSION	DIAMETER	mm	325	
	MODEL/NO. OF SPEED		M550 / Manual 5-Speed	
	TYPE		Five (5) forward and one (1) reverse, overdrive, synchromesh 1 st - 5 th	
AXLE	RATIO (1st - Top)		4.981 / 0.738	
	FRONT TYPE		Reversed Elliot, "I" section beam	
	CAPACITY	kg	3,100	
	REAR TYPE		Full floating, single reduction, single speed by hypoid gearing	
BRAKE	CAPACITY	kg	5,100	
	SERVICE BRAKE TYPE		Hydraulic system with two leading shoes for front wheels and dual two leading shoes for rear wheels with auto brake shoe adjuster	
	SERVICE BRAKE CONTROL		Vacuum servo hydraulic, dual circuits with Antilock Braking System (ABS) and power assist	
	PARKING BRAKE TYPE		Mechanical, internal expanding, acting on transmission output shaft	
SUSPENSION	EXHAUST BRAKE TYPE		Electric-vacuum actuator with valve in exhaust pipe	
	FRONT TYPE		Semi elliptic leaf spring with dual acting shock absorber and stabilizer	
	REAR TYPE		Semi elliptic main and auxiliary leaf spring with dual acting shock absorber	
FRAME	FRONT TYPE			
	FRAME WIDTH	mm	750	
CABIN	HEIGHT x WIDTH x THICKNESS	mm	192.8 x 65 x 5.9	
	TILTING		Rigid Type	
	STEERING		Telescopic & tilt steering column with locking device, recirculating ball with hydraulic booster, integral type	
	HINO ARMTECH		Equipped	
	POWER WINDOW		Equipped	
	CENTRAL LOCKING		Equipped	
WHEELS & TIRES	SEAT BELT		Equipped	
	WHEEL TYPE		6 stud	
	RIM SIZE		17.5 x 6.00GS - 127	
ELECTRICAL	TIRE SIZE		215/75R17.5-12PR	
	TYPE		24V, Negative Earth	
	BATTERIES		12V x 2, Series connection	
FUEL TANK CAPACITY	ALTERNATOR CAPACITY		24V - 60 Amps	
			100	
PERFORMANCE				
G.V.W Rating		kg	7,500	
PERFORMANCE	MAX SPEED	km/h	100 (* With Speed Limiter)	
	GRADEABILITY	(tan Ø) %	44.9	
TRANSMISSION RATIO	MODEL		M550	
	1st		4.981	
	2nd		2.911	
	3rd		1.556	
	4th		1.000	
	5th		0.738	
REAR AXLE	REVERSE		4.625	
	MODEL		SH12	
	RATIO		5.125	
DIMENSION & MASS				
CHASSIS MASS (with std tools set & spare tire)	FRONT AXLE	kg	1,700	
	REAR AXLE	kg	995	
	TOTAL	kg	2,695	
DIMENSION	WHEELBASE	WB	mm	3,870
	OVERALL LENGTH	OL	mm	6,740
	OVERALL WIDTH	OW	mm	1,995
	OVERALL HEIGHT	OH	mm	2,235
	CAB TO AXLE CENTER	CA	mm	2,300
	FRONT OVERHANG	FOH	mm	1,115
	REAR OVERHANG	ROH	mm	1,755
	FRONT TREAD	FT	mm	1,655
	REAR TREAD	RT	mm	1,520
	TURNING RADIUS (on tire)		mm	6,400
	SEATING CAPACITY			7 (Subject to JPJ Approval)

HINO MOTORS SALES (MALAYSIA) SDN. BHD. is engaged in an ongoing research and development program, and reserves the right to change specification without prior notice in order to pass on to the customer any resulting advances or technical refinements. All specifications of the product are within normal manufacturing allowances and tolerances.

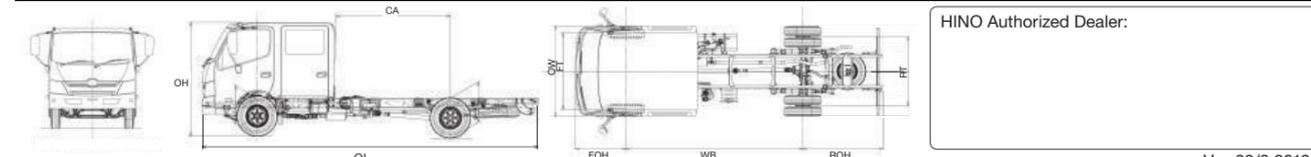

HINO Authorized Dealer:

Ver. 03/3.2018



HINO 300 SERIES

Compliance with United Nations Regulation (UNR) by JPJ



XZU720 CREW 156ps

Designed GVW 7,500 kg (6 Wheeler)

WARRANTY*
36 MONTHS or 100,000KM

FREE*
SERVICE PROGRAM
3 TIMES (1st-3rd Service)

FREE*
PARTS PROGRAM
7 TIMES (4th-10th Service)

PROTECTED BY
HINO ArmTech

BREAKDOWN
24 HOURS SERVICE
Toll Free: 1800-88-3666

Terms and Conditions apply*

HINO MOTORS SALES (MALAYSIA) SDN BHD (187863-U)


Selangor: Lot PT 24, Jalan 223, Section 51A, 46100 Petaling Jaya, Selangor Darul Ehsan, Malaysia. Tel: (603) 7957 5199 (12 lines) Fax: (603) 7954 3276

Sarawak: Lot 1076, Block 218, 4th Mile, Penrissen Road, 93250 Kuching, Sarawak, Malaysia. Tel: (082) 451 611 (5 lines) Fax: (082) 451 993

Sabah: Miles 4 1/2 Jalan Tuaran, Lot No. 353, Taman Cempaka, Likas, 88450 Kota Kinabalu, Sabah, Malaysia. Tel: (088) 393 663 Fax: (088) 424 223

www.hino.com.my

PERFORMANCE


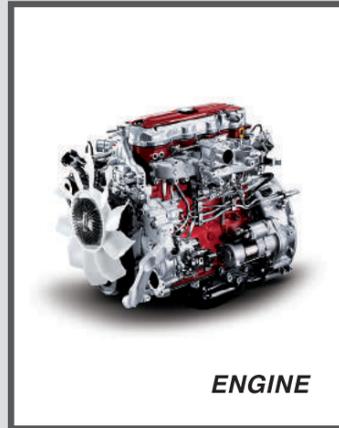


EURO 3
XZU720 CREW

Model:
N04C-VB
Type:
**4,009cc 4-cylinder in-line
Electronic Control
Commonrail**

Output (kW/rpm):
114 (156PS)/2,800rpm

Torque (Nm/rpm):
429Nm (43.8kgfm)/1,400rpm

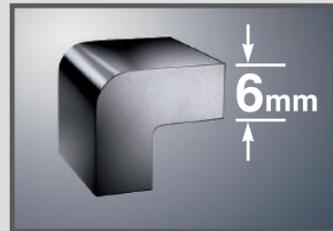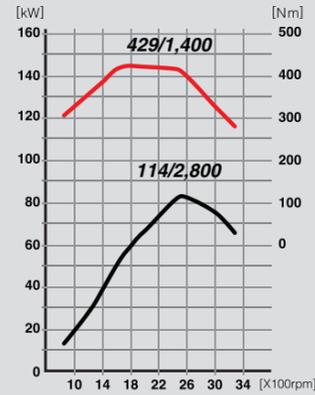

Frame


The frame is both very strong and lightweight



Suspension

The leaf spring suspension offers high durability and flexibility for stability on rough roads.

COMFORTABILITY

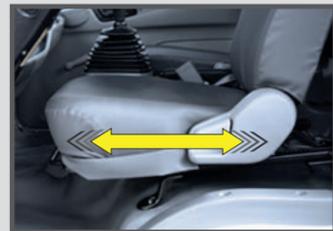

Seat Slide

The seat rails are set on an incline to accommodate your seating position.



Folding Type Shift Lever

The shift lever and side lever fold down, making it easy to move around the driver compartment.



Ergonomics and Accessibility (Crew Cab: Rear Seat)

Plenty of space for 4 adults (*2 adults shown).
Generous storage space when the seat is stowed.
*Seating capacity: 7 seater (Subject to JPJ Approval)



LED Meter Panel

The meter cluster features highly visible readouts of necessary vehicle information.



Overhead Console


Greater convenience for documents storage with open section which allows easy access.



Work Space

Intuitively designed, spacious and comfortable, the cab space allows drivers to perform at their best.

SAFETY

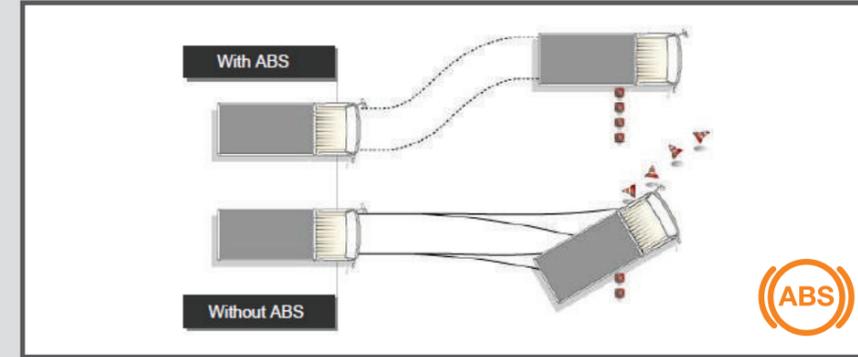

Antilock Braking System (ABS)

ABS helps the driver maintain control of the vehicle when braking on a slippery surface by selectively controlling the braking force of individual wheel in order to prevent the wheels from locking.



EGIS Cab (Emergency Guard Impact Safety)

The EGIS Cab Design is one of HINO'S passive safety features, enhancing the rigidity of the cab.



Drum Brake

Equipped with auto brake shoe adjuster to ensure safe & effective braking. It features easy maintenance without compromising on performance.



Tubeless Tyres

Provides good tyre puncture resistance for better safety. Better fuel efficiency due to lighter tyre and lower rolling resistance.



Stabilizer

The stabilizer have been lengthened and feature a link bracket, maintaining high effectiveness and stability.



Door Impact Beams

The side impact beams built into the doors of the 300 Series increase the level of protection for driver and passenger in the event of a collision from the side.




Side Mirror

The door-mounted outer mirrors enhance driver's vision. It features partitioned mirror surfaces encased in an aerodynamic and low-profile shell.



Wide View Pillars

The front pillars are designed to be as narrow as possible to ensure a nearly uninterrupted view, allowing the driver to easily see pedestrians and cyclist, without any compromise in structural integrity.



Energy-Absorbing Steering Wheel and Column


The energy-absorbing steering wheel and column reduce collision force.



Headlamp Leveling Switch

The Headlamp Leveling Switch can be used to adjust the headlamp illumination distance.

APPLICATION

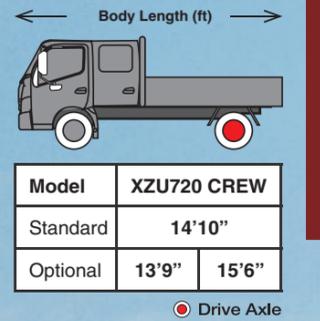

Body Type

A truck for every application of bodies suit your type of business.



General Cargo



Box



Curtain Sider



Refrigerated



Tipper



Crane Cargo



Roll On Roll off



Tanker



Garbage Compactor

Note : Some images may be used for illustration purposes only.